



CAVIUS Smart Remote

HOW TO USE – QUICK GUIDE

1 KNOWING YOUR SMART REMOTE

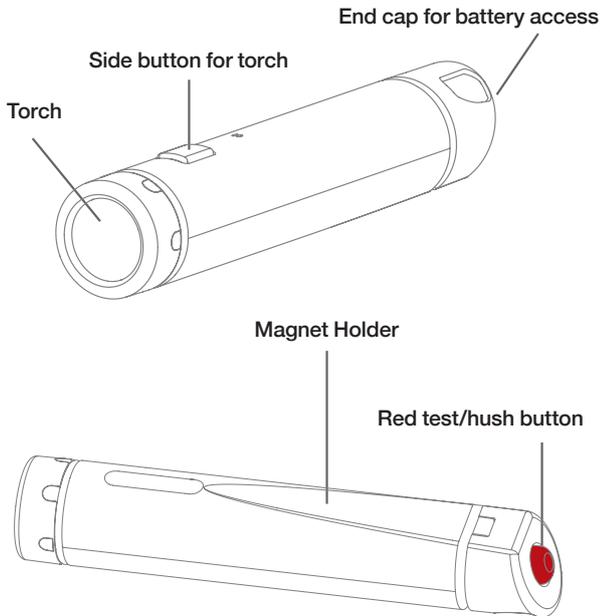


2 ALARM MODE & HUSHING THE SMOKE ALARMS WITH THE REMOTE

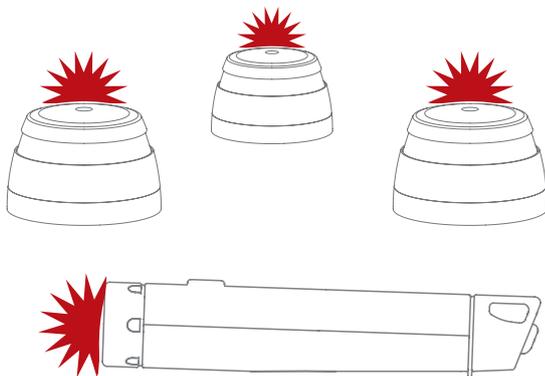

Alarm Mode:

When the smoke alarms start to sound, the Smart Remote will vibrate and the LED torch will flash rapidly (stroboscopic). The torch can be switched from stroboscopic flashing to constant light by pressing the black side button.

3 HUSHING THE SMOKE ALARMS WITH THE REMOTE

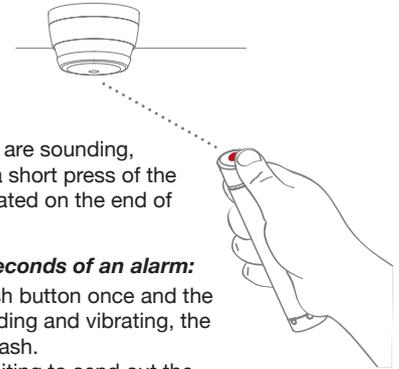

Hushing the alarms:

When the smoke alarms are sounding, they can be hushed by a short press of the red test/hush button located on the end of the Smart Remote.

During the first 30 seconds of an alarm:

Press the red test/hush button once and the remote will stop sounding and vibrating, the LED will continue to flash.

The remote is now waiting to send out the hush signal which will start automatically within 30 seconds.

After 30 seconds of an alarm:

Press the red test/hush button once and the remote will send out a hush signal for 13 seconds. This can be performed on all the smoke alarms in the house.

You can hush all the alarms immediately by hushing the alarm that originally sensed the smoke or fire (this alarm will be the only that is flashing).

The Smart Remote can only stop the alarmed device after 30 seconds in alarm mode. The reason for this is to make sure you have identified the source of the fire before using the hush function.

Please note: Due to certification standards - the hush signal is transmitted with reduced power. The remote must be within 4m to hush an alarm (which means you should be in the same room as the alarm).

4 LED TORCH

The torch can be turned on and off by pressing the side button.


Please note: The light will turn off automatically after 5 minutes.

5 LOW BATTERY SIGNAL

The remote will issue a 30 day low battery warning, by conducting a short beep every 48 seconds.

Only the Smart Remote will be affected by the low battery beep, the smoke alarms will not beep.

It is safe to change batteries in the Smart Remote without going through the learn process again – it will not forget the codes during the battery change process.

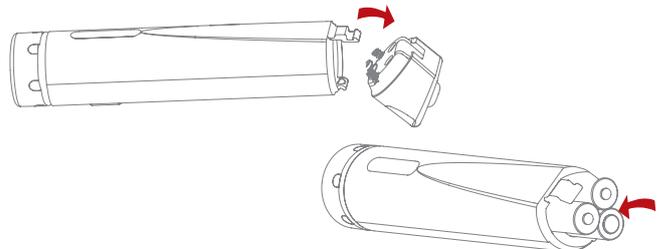

Please note: The Smart Remote uses 3 x AAA batteries.

For any questions about the CAVIUS products, please contact:

CAVIUS
THE WORLD'S SMALLEST ALARMS

CAVIUS Australia Pty Limited

Ph: 07 3556 1441 | info@cavius.com.au | cavius.com.au